





## SFX/Budget Telecom CCS 3 Pair



| Cable Construction                 |                     | CCS          |
|------------------------------------|---------------------|--------------|
| Multi Construction:                | 3 Pairs CCS         |              |
| Nom.OD(mm)                         | 0.50±0.01           |              |
| Insulation                         |                     | FR PVC       |
| Insulation Diameter (mm)           | 0.90±0.10 x2 x3     |              |
| Colours                            |                     |              |
| Pair 1                             | White/Blue          | Blue/White   |
| Pair 2                             | White/Orange        | Orange/White |
| Pair 3                             | White/Green         | Green/White  |
| Rip Cord                           |                     |              |
| Rip Cord                           | White Nylon         |              |
| Jacket                             |                     | PVC          |
| Surface                            | Clean,Smooth        |              |
| Diameter (mm)                      | 4.0±0.18            |              |
| Material                           | PVC(complies RoHS)  |              |
| Color                              | white               |              |
| Physical Properties                |                     |              |
| Before Aging Tensile Strength(Mpa) | >12.5               |              |
| Elongation(%)                      | >125                |              |
| Aging Period(°C×hrs)               | 80°C×24h×7d         |              |
| After Aging Tensile Strength(Mpa)  | >10                 |              |
| Elongation(%)                      | >100                |              |
| Cold bend(-20+/-2°C×4h)            | No visible cracks   |              |
| Electrical Characteristics         |                     |              |
| Max Conductor DC Resistance        | 50.19 at 20°CΩ/100m |              |
| Min.Insulation DC Resistance       | 200 at 20°C (MΩ*M)  |              |
| Rated Temperature(°C)              | 60°C                |              |
| Rated Voltage (V)                  | 30                  |              |

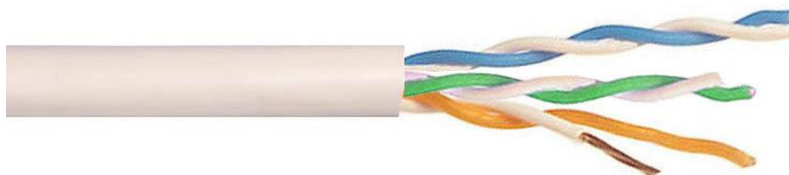


## SFX/Budget Telecom CCS 4 Pair

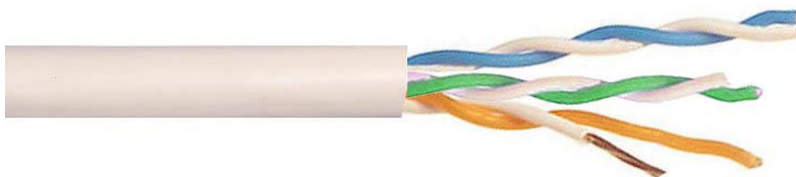

| Cable Construction                 |                     | CCS          |
|------------------------------------|---------------------|--------------|
| Multi Construction:                | 4 Pairs CCS         |              |
| Nom.OD(mm)                         | 0.50±0.01           |              |
| Insulation                         |                     | FR PVC       |
| Insulation Diameter (mm)           | 0.90±0.10 x2 x4     |              |
| Colours                            |                     |              |
| Pair 1                             | White/Blue          | Blue/White   |
| Pair 2                             | White/Orange        | Orange/White |
| Pair 3                             | White/Green         | Green/White  |
| Pair 4                             | White/Brown         | Brown/White  |
| Rip Cord                           |                     |              |
| Rip Cord                           | White Nylon         |              |
| Jacket                             |                     | PVC          |
| Surface                            | Clean,Smooth        |              |
| Diameter (mm)                      | 4.6±0.18            |              |
| Material                           | PVC(complies RoHS)  |              |
| Color                              | white               |              |
| Physical Properties                |                     |              |
| Before Aging Tensile Strength(Mpa) | >12.5               |              |
| Elongation(%)                      | >125                |              |
| Aging Period(°C×hrs)               | 80°C×24h×7d         |              |
| After Aging Tensile Strength(Mpa)  | >10                 |              |
| Elongation(%)                      | >100                |              |
| Cold bend(-20+/-2°C×4h)            | No visible cracks   |              |
| Electrical Characteristics         |                     |              |
| Max Conductor DC Resistance        | 50.19 at 20°CΩ/100m |              |
| Min.Insulation DC Resistance       | 200 at 20°C (MΩ*M)  |              |
| Rated Temperature(°C)              | 60°C                |              |
| Rated Voltage (V)                  | 30                  |              |



## SFX/Budget Telecom CCS 6 Pair

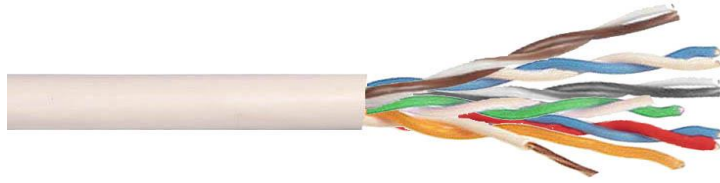

| Cable Construction                 |                     | CCS          |
|------------------------------------|---------------------|--------------|
| Multi Construction:                | 6 Pairs CCS         |              |
| Nom.OD(mm)                         | 0.50±0.01           |              |
| Insulation                         |                     | FR PVC       |
| Insulation Diameter (mm)           | 0.90±0.10 x2 x6     |              |
| Colours                            |                     |              |
| Pair 1                             | White/Blue          | Blue/White   |
| Pair 2                             | White/Orange        | Orange/White |
| Pair 3                             | White/Green         | Green/White  |
| Pair 4                             | White/Grey          | Grey/White   |
| Pair 5                             | Red/Blue            | Blue/Red     |
| Pair 6                             | White/Brown         | Brown/White  |
| Rip Cord                           |                     |              |
| Rip Cord                           | White Nylon         |              |
| Jacket                             |                     | PVC          |
| Surface                            | Clean,Smooth        |              |
| Diameter (mm)                      | 5.7±0.18            |              |
| Material                           | PVC(complies RoHS)  |              |
| Color                              | white               |              |
| Physical Properties                |                     |              |
| Before Aging Tensile Strength(Mpa) | >12.5               |              |
| Elongation(%)                      | >125                |              |
| Aging Period(°C×hrs)               | 80°C×24h×7d         |              |
| After Aging Tensile Strength(Mpa)  | >10                 |              |
| Elongation(%)                      | >100                |              |
| Cold bend(-20+/-2°C×4h)            | No visible cracks   |              |
| Electrical Characteristics         |                     |              |
| Max Conductor DC Resistance        | 50.19 at 20°CΩ/100m |              |
| Min.Insulation DC Resistance       | 200 at 20°C (MΩ*M)  |              |
| Rated Temperature(°C)              | 60°C                |              |
| Rated Voltage (V)                  | 30                  |              |